STANDARD BODIES FOR 10-3 SERIES CARTRIDGES

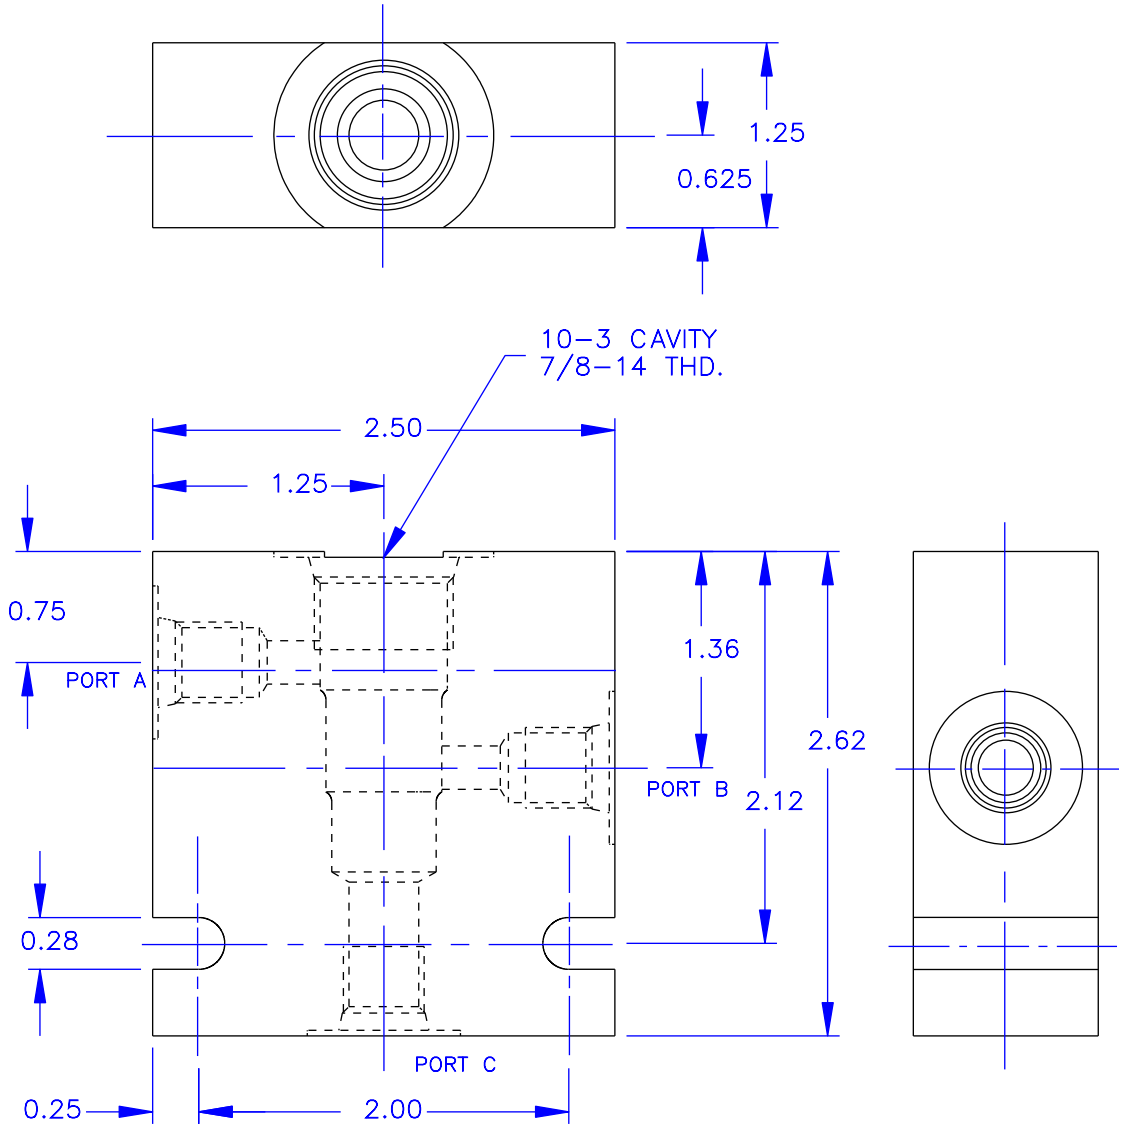

RATED PRESSURE = 3500 PSI

TO ORDER A CARTRIDGE VALVE IN A BODY AS AN ASSEMBLY, ADD THE LAST TWO DIGITS OF THE BODY PART NUMBER TO THE END OF THE CARTRIDGE NUMBER.
EXAMPLE: 2510–2P

STANDARD BODIES ARE ALUMINUM, CONSULT FACTORY FOR ALTERNATE MATERIALS.

– ORDERING INFORMATION –

BODY NUMBER 10–3–XX

CAVITY TYPE

A, B & C PORT SIZE
- –2P = 1/4 NPTF
- –3P = 3/8 NPTF
- –4T = #4 SAE
- –6T = #6 SAE
- –8T = #8 SAE

Vonberg Valve, inc.
HYDRAULIC VALVE SPECIALISTS

3800 INDUSTRIAL AVE.
ROLLING MEADOWS, IL 60008–1085
PH: (847) 259–3800 FAX: (847) 259–3997