




VELOCITY FUSE

28000-200 SERIES

IN-LINE

FEMALE SAE O-RING PORTS

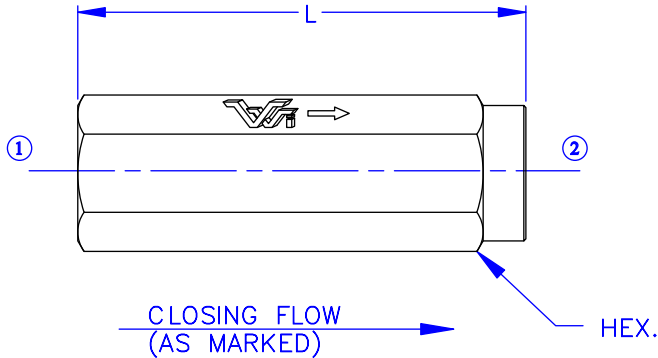

DESCRIPTION


- AN IN-LINE VELOCITY FUSE WITH FEMALE SAE O-RING INLET AND OUTLET THAT PROVIDES FULL-LINE SHUT-OFF IN THE EVENT OF A LINE FAILURE.

OPERATION

- A FLOW BELOW THE SPECIFIED LIMIT IS ALLOWED FROM "1" TO "2".
- FLOW ABOVE THE SPECIFIED LIMIT IS ASSUMED TO BE A LINE FAILURE AND IS BLOCKED.
- FLOW FROM "2" TO "1" PASSES THRU THE CONTROLLING ORIFICE BUT IS UNCONTROLLED.
- CLOSING FLOW TOLERANCE= +15%/-0%

FEATURES

- STEEL COMPONENTS.
- FAIL SAFE DESIGN.
- RAPID RESPONSE.



- SPECIFICATIONS -	
HYDRAULIC SYMBOL	
OPERATING PRESSURE	3500 PSI
TEMPERATURE RANGE	250°F TO -40°F
REOPENING DIFFERENTIAL	50 PSI
ALL DIMENSIONS IN INCHES	

- ORDERING INFORMATION -	
ASSEMBLY NUMBER	28000-2XX-XX
SERIES NUMBER	_____
PORT SIZE	_____
CLOSING FLOW (GPM)	_____

MODEL	PORT 1 / 2	THREAD	FLOW RANGE	L	HEX.
28000-204	#4 SAE	7/16-20	0.1 - 4.0 GPM	2.75	0.625
28000-206	#6 SAE	9/16-18	0.5 - 10.0 GPM	3.00	0.750
28000-208	#8 SAE	3/4-16	1.0 - 25.0 GPM	3.38	0.938
28000-210	#10 SAE	7/8-14	2.0 - 40.0 GPM	3.75	1.125
28000-212	#12 SAE	1 1/16-12	2.0 - 50.0 GPM	4.25	1.375



Vonberg Valve, inc.
HYDRAULIC VALVE SPECIALISTS

3800 INDUSTRIAL AVE.
ROLLING MEADOWS, IL 60008-1085
PH: (847) 259-3800 FAX: (847) 259-3997